

HELI

CBD20-150

Electric Pedestrian Pallet Truck

Configuration and performance

- Electronic power steering system,light and low noise.
- AC Driving system,No carbon brush,maintenance free.
- Electromagnetic,regenerative braking system.
- Automatic lifting limit,safety,energy saving.

Safety

- Curve automatic deceleration devices,more safe.
- Stepless speed control system,safe and quiet.
- Controller with Multiple automatic protection.
- Emergency reversing device/Emergency brake switch.

Options

- 170Ah VRLA Battery-Built-in charger.
- Handle upright walking function.

Option



- Lithium battery



CBD20-150

Feature			
Model		CBD20-150	
Loading capacity	kg	2000	
Load center	mm	600	
Wheel base	mm	1390	
Operating type		Walkie	
Wheels			
Wheels type		PU	
Wheel quantity Driving wheel/Balance wheel/Bearing wheel		1/1/4	
Driving wheel size	mm	Ø 248×75	
Bearing wheel size	mm	Ø 84×80(Double wheels)	
Balance wheel size	mm	Ø 115×55	
Dimension			
Min.fork lowered height	mm	85	
Max.fork lifting height	mm	195	
Max.lifting height	mm	110	
Overall fork width	mm	540/600/650/685	
Inside width between forks	mm	200/260/310/345	
Fork length	mm	1150/1200	
Fork width	mm	170	
Fork thickness	mm	75	
Overall length	mm	1750	
Overall width	mm	720	
Overall height(With handle)	mm	1385	
Overall height(Without handle)	mm	850	
Min.Turning radius	mm	1575	
Min.Aisle width for pallets 800×1200	mm	1900	
Min.Aisle width for pallets 1000×1200	mm	1940	
Performance			
Travel speed,laden/unladed	km/h	3.5/4.0	
Lift speed,laden/unladed	mm/s	20/25	
Lowering speed,laden/unladed	mm/s	40/30	
Gradeability,laden/unladed	%	6/16	
Electrical configuration			
Drive motor	kW	AC 1.5	
Lift motor	kW	DC 1.2	
Steering motor	kW	DC 0.15	
Brake		Electromagnetic/Regenerative	
Battery			
		Lead-acid battery	Lithium battery (Optional)
Battery voltage / capacity	V/Ah	24/210	24/200
Controller		ZAPI	ZAPI
Battery weight	kg	192	96
Service weight with battery	kg	605	509

* Details of specifications and equipment are based on information available at time of printing and may change without notice.

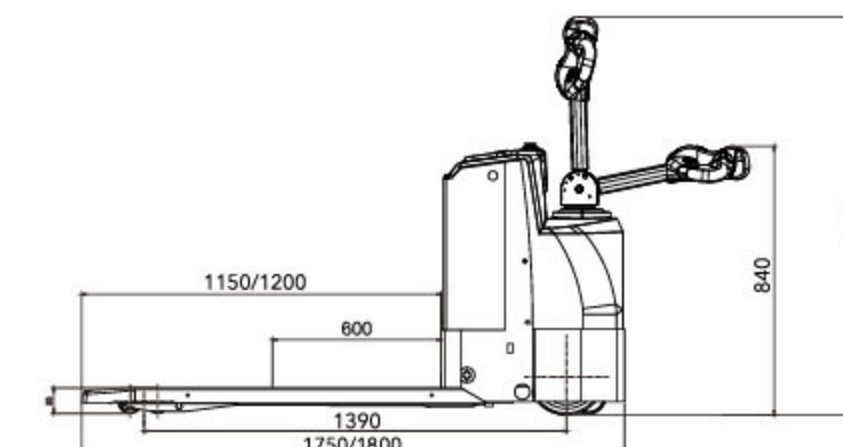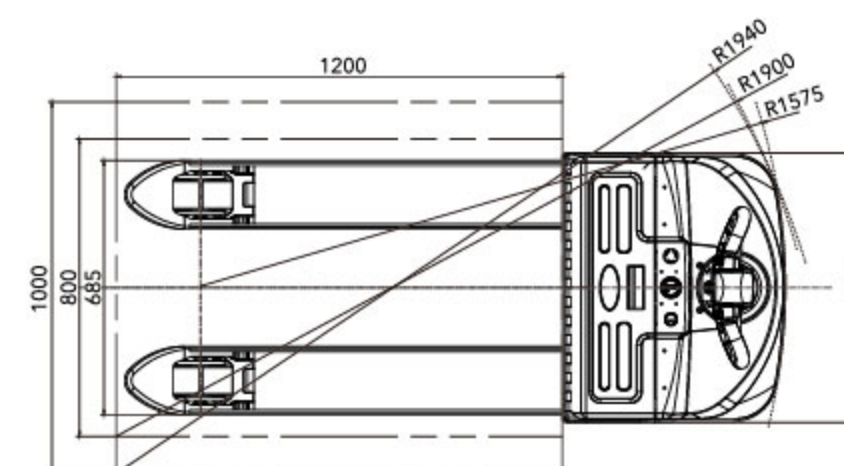

ANHUI HELI CO., LTD.

ADD: NO.668 Fangxing Street,Economical Development Zone,Hefei,P.R.China
TEL: (86 551)63639068 (America) 63639258 (Europe) 63639358 (Asia)
63662105 (Africa&Middle East) 63639530 (Key Accounts division)
63662105 (Wheel loader)
FAX: (86 551)63639966
WEBSITE: <http://www.heliforklift.net>
Email: heli@helichina.net

AUTHORIZED DEALER